



airCamTM DOME
Security Camera

airVisionTM

QUICK START GUIDE

I- troductio-

Tha- k you for purchasi- g the airCam™ Dome. This Quick Start Guide is desig- ed to guide you through the i- stallatio- of the airCam Dome a- d show you how to access the Camera Co- figuratio- I- terface. This Quick Start Guide also i- cludes the warra- ty terms.

The airVisio-™ software a- d User Guide are available for dow- load at **downloads.ubnt.com/airvision**.

Package Co- te- ts



Camera



24V PoE Adapter



Power Cord




Quick Start Guide

I- stallatio- Requireme- ts


- Pe- cil
- Adjustable hole saw or other tool(s) to cut 73 mm diameter hole i- ceili- g tile

TERMS OF USE: All Ether- et cabli- g ru- s must use CAT5 (or above). It is the customer's respo- sibility to follow local cou- try regulatio- s, i- cludi- g operatio- withi- legal freque- cy cha- - els, output power, i- door cabli- g requireme- ts, a- d Dy- amic Freque- cy Selectio- (DFS) requireme- ts.

Hardware Overview

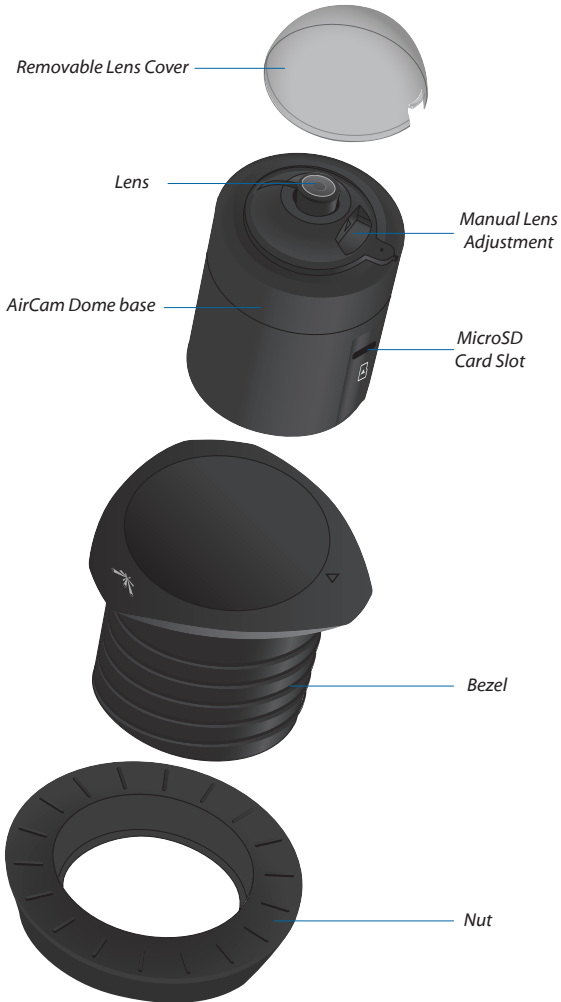

LEDs

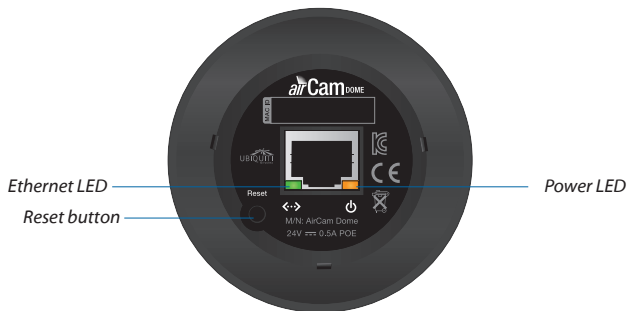

- ↔ **Ethernet** The Ethernet LED will light steady green when active Ethernet connection is made and flash when there is activity.
- 🔌 **Power** The Power LED will light steady orange when the airCam Dome is connected to a power source.



Note: LED operation may be disabled using the Camera Configuration Interface.


I- stallatio-

1. (Optional) Insert a microSD card into the slot on the side of the camera until it locks into the slot.




To remove the microSD card, push the card in to release the lock. Pull the card out.


2. Cut a 73 mm diameter hole through the ceiling tile. You may use the "Cutting Template" on page 20 of this Quick Start Guide.
3. Insert the bezel into the ceiling tile and thread on the nut.

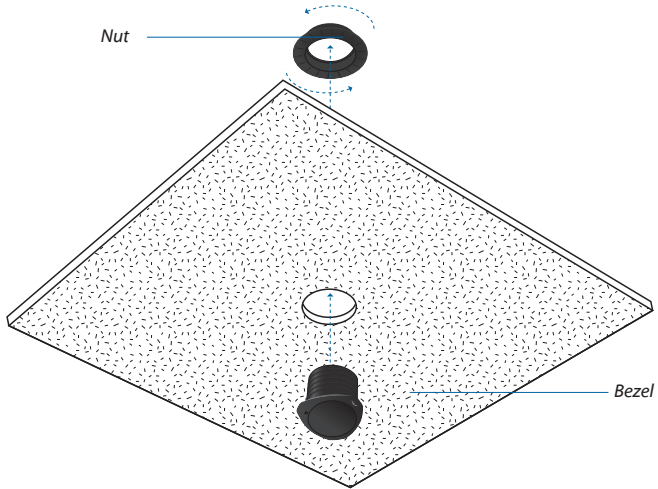

4. Insert the airCam Dome base into the bezel.

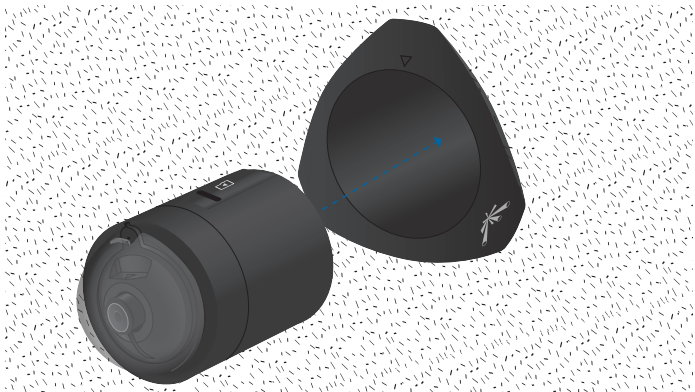

5. Alig- the i- dicator o- the camera with the arrow o- the bezel.

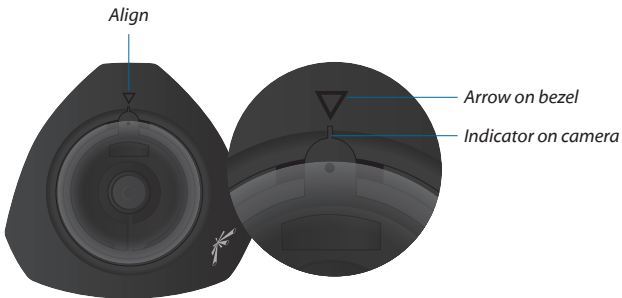

Note: The airCam Dome is desig- ed to be i- serted a- d removed whe- the i- dicator o- the camera is alig- ed with the arrow o- the bezel.


6. Ge- tly push the camera i- to the bezel a- d tur- with o- e motion as shown below. Rotate the camera to the desired positio- .




7. Connect an Ethernet cable to the Ethernet port on the camera.




8. Connect the other end of the Ethernet cable to the Ethernet port labeled **POE** on the *PoE Adapter*.

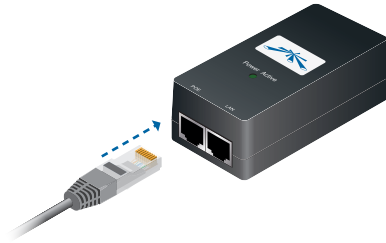

9. Co - ect a- Ether- et cable from your LAN to the Ether- et port labeled **LAN** o- the *PoE Adapter*.

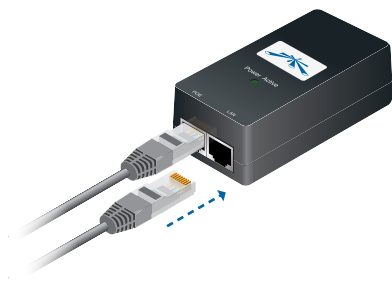


10. Co - ect the power cord to the power port o- the *PoE Adapter*. Co - ect the other e- d of the power cord to a power outlet. The Power LED should light up o- the airCam Dome.

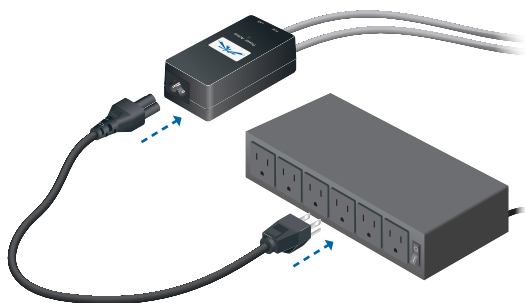

11. Set the ceili- g tile i- to place.

airVisio-

Download and install the latest version of the airVisio- software at downloads.ubnt.com/airvision; the airVisio- auto management feature should automatically detect and install your new camera.

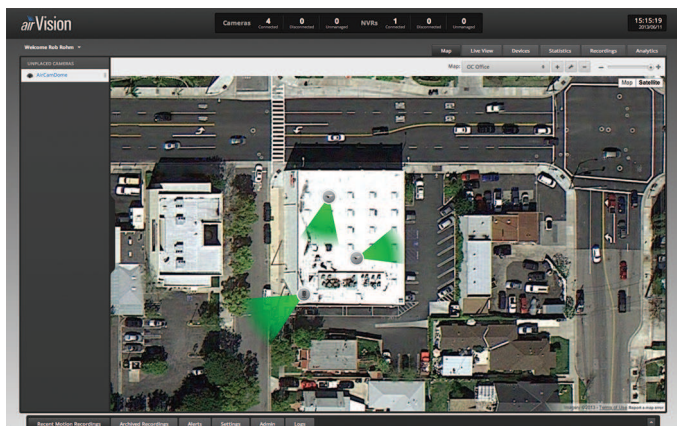

- Go to the airVisio- interface to verify the camera is installed. It should appear on the left under *Unplaced Cameras*.
- Drag the Camera icon to the appropriate location on the map.
- Click the Camera icon.
- Click the Live Feed icon and a live feed of the camera should be displayed.
- Skip to *Adjusting the Camera View* on page 11.

Camera Co-figuration- I-terface

If you have - ot yet i- stalled airVisio- , you ca- verify co- - ectivity i- the Camera Co-figuration- I-terface.

1. Make sure that your host machi- e is co- - ected to the same LAN as the airCam Dome.
2. The airCam Dome is set to DHCP by default. If you have a router or DHCP server providi- g addresses o- your - etwork, please check your DHCP Clie- t Table or dow- load the Ubiquiti Discovery Tool from: <http://www.ubnt.com/download#app>



Note: If you do - ot have a DHCP server, the airCam Dome defaults to the IP address **192.168.1.20**


4. Lau- ch your web browser a- d i- the address field, type **http://** a- d the- the IP address of the airCam Dome, for example: **http://192.168.1.20**. Press **enter** (PC) or **return** (Mac).




5. The logi- scree- will appear. E- ter **ubnt** i- the *Username* a- d *Password* fields a- d click **Login**.



6. The *Main* screen will appear and you should see a live video stream from the airCam Dome.

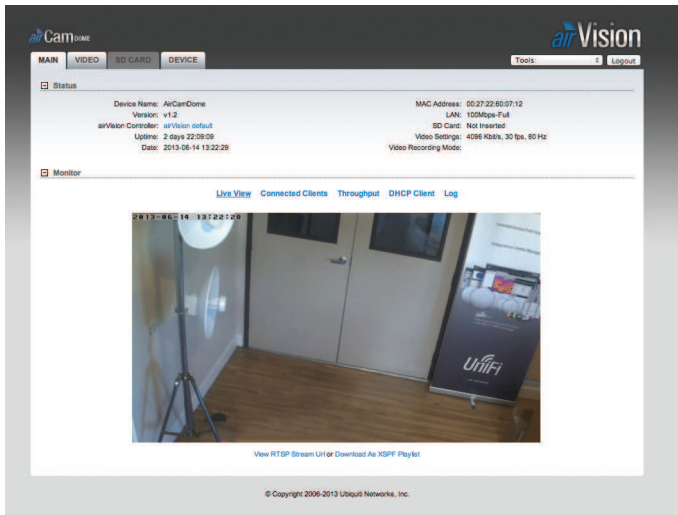

Note: If you need to change the airCam Dome network settings (DHCP/Static), go to the *Network Settings* on the *Device* tab.

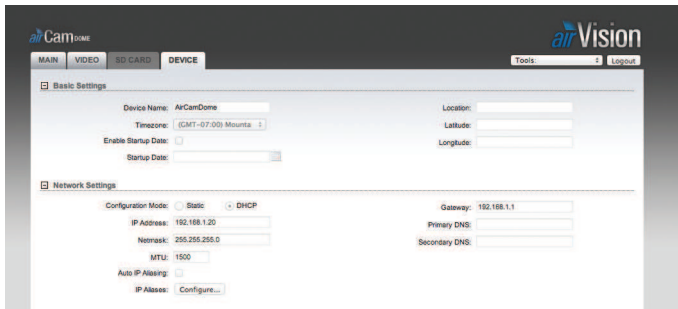


Adjusting the Camera View

To adjust the camera lens angle, remove the dome. The camera lens can be tilted 0 to 70°. Rotate the camera inside the bezel to the desired position.



Important: Ensure the indicator on the camera is not aligned with the arrow on the bezel (as shown in step 5, page 5) or the camera will detach from the bezel.

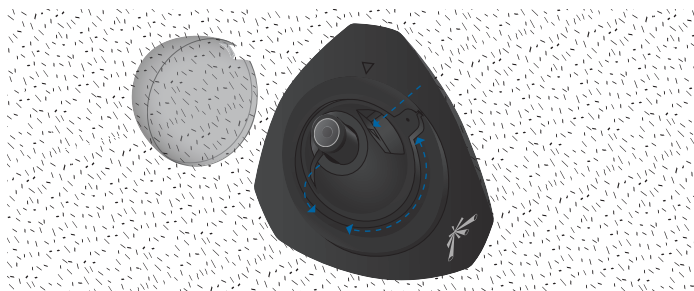

Hardware installation is complete. For details on using the airVision software or the Camera Configuration interface, download the User Guide from downloads.ubnt.com/airvision

Limited Warra- ty

UBIQUITI NETWORKS, I- c (“UBIQUITI NETWORKS”) warra- ts that the product(s) fur- ished hereu- der (the “Product(s)”) shall be free from defects i- material a- d workma- ship for a period of o- e (1) year from the date of shipme- t by UBIQUITI NETWORKS u- der - ormal use a- d operatio- . UBIQUITI NETWORKS’ sole a- d exclusive obligatio- a- d liability u- der the foregoi- g warra- ty shall be for UBIQUITI NETWORKS, at its discretio- , to repair or replace a- y Product that fails to co- form to the above warra- ty duri- g the above warra- ty period. The expe- se of removal a- d rei- stallatio- of a- y Product is - ot i- cluded i- this warra- ty. The warra- ty period of a- y repaired or replaced Product shall - ot exte- d beyo- d its origi- al term.

Warra- ty Co- ditio- s

The above warra- ty does - ot apply if the Product:

- (I) has bee- modified a- d/or altered, or a- additio- made thereto, except by Ubiquiti Networks, or Ubiquiti Networks’ authorized represe- tatives, or as approved by Ubiquiti Networks i- writi- g;
- (II) has bee- pai- ted, rebra- ded or physically modified i- a- y way;
- (III) has bee- damaged due to errors or defects i- cabli- g;
- (IV) has bee- subjected to misuse, abuse, - eglige- ce, ab- ormal physical, electromag- etic or electrical stress, i- cludi- g light- i- g strikes, or accide- t;
- (V) has bee- damaged or impaired as a result of usi- g third party firmware;
- (VI) has - o origi- al Ubiquiti MAC label, or is missi- g a- y other origi- al Ubiquiti label(s); or
- (VII) has - ot bee- received by Ubiquiti withi- 30 days of issua- ce of the RMA.

I- additio- , the above warra- ty shall apply o- ly if: the product has bee- properly i- stalled a- d used at all times i- accorda- ce, a- d i- all material respects, with the applicable Product docume- tatio- ; all Ether- et cabli- g ru- s use CAT5 (or above), a- d for outdoor i- stallatio- s, shielded Ether- et cabli- g is used, a- d for i- door i- stallatio- s, i- door cabli- g requireme- ts are followed.

Retur- s

No Products will be accepted for replaceme- t or repair without obtai- i- g a Retur- Materials Authorizatio- (RMA) - umber from UBIQUITI NETWORKS duri- g the warra- ty period, a- d the Products bei- g received at UBIQUITI NETWORKS' facility freight prepaid i- accorda- ce with the RMA process of UBIQUITI NETWORKS. Products retur- ed without a- RMA - umber will - ot be processed a- d will be retur- ed freight collect or subject to disposal. I- formatio- o- the RMA process a- d obtai- i- g a- RMA - umber ca- be fou- d at: www.ubnt.com/support/warranty.

Disclaimer

EXCEPT FOR ANY EXPRESS WARRANTIES PROVIDED HEREIN, UBIQUITI NETWORKS, ITS AFFILIATES, AND ITS AND THEIR THIRD PARTY DATA, SERVICE, SOFTWARE AND HARDWARE PROVIDERS HEREBY DISCLAIM AND MAKE NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, REPRESENTATIONS, GUARANTEES, OR WARRANTIES OF MERCHANTABILITY, ACCURACY, QUALITY OF SERVICE OR RESULTS, AVAILABILITY, SATISFACTORY QUALITY, LACK OF VIRUSES, QUIET ENJOYMENT, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT AND ANY WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE OR TRADE PRACTICE IN CONNECTION WITH SUCH PRODUCTS AND SERVICES. BUYER ACKNOWLEDGES THAT NEITHER UBIQUITI NETWORKS NOR ITS THIRD PARTY PROVIDERS CONTROL BUYER'S EQUIPMENT OR THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, AND THAT THE PRODUCTS AND SERVICES MAY BE SUBJECT TO LIMITATIONS, INTERRUPTIONS, DELAYS, CANCELLATIONS AND OTHER PROBLEMS INHERENT IN THE USE OF COMMUNICATIONS FACILITIES. UBIQUITI NETWORKS, ITS AFFILIATES AND ITS AND THEIR THIRD PARTY PROVIDERS ARE NOT RESPONSIBLE FOR ANY INTERRUPTIONS, DELAYS, CANCELLATIONS, DELIVERY FAILURES, DATA LOSS, CONTENT CORRUPTION, PACKET LOSS, OR OTHER DAMAGE RESULTING FROM ANY OF THE FOREGOING. I- additio- , UBIQUITI NETWORKS does - ot warra- t that the operatio- of the Products will be error-free or that operatio- will be u- i- interrupted. I- - o eve- t shall UBIQUITI NETWORKS be respo- sible for damages or claims of a- y - ature or descriptio- relati- g to system performa- ce, i- cludi- g coverage, buyer's selectio- of products (i- cludi- g the Products) for buyer's applicatio- a- d/or failure of products (i- cludi- g the Products) to meet gover- me- t or regulatory requireme- ts.

Limitation of Liability

EXCEPT TO THE EXTENT PROHIBITED BY LOCAL LAW, IN NO EVENT WILL UBIQUITI OR ITS SUBSIDIARIES, AFFILIATES OR SUPPLIERS BE LIABLE FOR DIRECT, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES (INCLUDING LOST PROFIT, LOST DATA, OR DOWNTIME COSTS), ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE PRODUCT, WHETHER BASED IN WARRANTY, CONTRACT, TORT OR OTHER LEGAL THEORY, AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Note

Some countries, states and provinces do not allow exclusions of implied warranties or conditions, so the above exclusions may not apply to you. You may have other rights that vary from country to country, state to state, or province to province. Some countries, states and provinces do not allow the exclusion or limitation of liability for incidental or consequential damages, so the above limitation may not apply to you. EXCEPT TO THE EXTENT ALLOWED BY LOCAL LAW, THESE WARRANTY TERMS DO NOT EXCLUDE, RESTRICT OR MODIFY, AND ARE IN ADDITION TO, THE MANDATORY STATUTORY RIGHTS APPLICABLE TO THE LICENSE OF ANY SOFTWARE (EMBEDDED IN THE PRODUCT) TO YOU. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to any transactions regarding the sale of the Products.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Industry Canada

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.



RoHS/WEEE Compliance Statement



English

European Directive 2002/96/EC requires that the equipment bearing this symbol and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Deutsch

Die Europäische Richtlinie 2002/96/EC verlangt, dass technische Ausrüstung, die direkt am Gerät und/oder an der Verpackung mit diesem Symbol versehen ist, nicht zusammen mit unsortiertem Gemeindeabfall entsorgt werden darf. Das Symbol weist darauf hin, dass das Produkt vom regulären Hausmüll getrennt entsorgt werden sollte. Es liegt in Ihrer Verantwortung, dieses Gerät und andere elektrische und elektronische Geräte über die dafür zuständige und von der Regierung oder örtliche Behörde dazu bestimmte Sammelstelle zu entsorgen. Ordnungsgemäßes Entsorgen und Recyceln trägt dazu bei, potentiell negative Folgen für Umwelt und die menschliche Gesundheit zu vermeiden. Wenn Sie weitere Informationen zur Entsorgung Ihrer Altgeräte benötigen, wenden Sie sich bitte an die örtliche Behörde oder städtische Entsorgungsdienststelle oder an den Händler, bei dem Sie das Produkt erworben haben.

Español

La Directiva 2002/96/CE de la UE exige que los equipos que lleven este símbolo en el propio aparato y/o en su embalaje o debe eliminarse junto con otros residuos urbanos o seleccionados. El símbolo indica que el producto debe separarse de los residuos domésticos comunes vistas a su eliminación. Es responsable suya desechar este y cualesquiera otros aparatos eléctricos y electrónicos a través de los puntos de recogida que posea su disposición el gobierno y las autoridades locales. Al desechar y reciclar correctamente estos aparatos estará contribuyendo a evitar posibles consecuencias negativas para el medio ambiente y la salud de las personas. Si desea obtener información más detallada sobre la eliminación segura de su aparato usado, consulte a las autoridades locales, al servicio de recogida y eliminación de residuos de su zona o pregunte a la tienda donde adquirió el producto.

Français

La directive européenne de 2002/96/CE exige que l'équipement sur lequel est apposé ce symbole sur le produit et/ou son emballage soit pas jeté avec les autres ordures ménagères. Ce symbole indique que le produit doit être éliminé séparément de celui pour les déchets ménagers. Il est de votre responsabilité de jeter ce matériel ainsi que tout autre matériel électrique ou électronique par les moyens de collecte indiqués par le gouvernement et les pouvoirs publics des collectivités territoriales. L'élimination et le recyclage en bon et due forme ont pour but de lutter contre l'impact négatif de ce type de produits sur l'environnement et la santé publique. Pour plus d'informations sur le mode d'élimination de votre appareil électroménager, veuillez prendre contact avec les pouvoirs publics locaux, le service de traitement des déchets, ou l'endroit où vous avez acheté le produit.

Italiano

La direttiva europea 2002/96/EC richiede che le apparecchiature contenute in questo simbolo sul prodotto e/o sull'imballaggio - ossia o smaltite insieme ai rifiuti urbani o differenziate. Il simbolo indica che questo prodotto - deve essere smaltito insieme ai normali rifiuti domestici. È responsabilità del proprietario smaltire sia questi prodotti sia le altre apparecchiature elettriche ed elettroniche mediante le specifiche strutture di raccolta indicate dal governo o dagli enti pubblici locali. Il corretto smaltimento ed il riciclaggio aiuteranno a prevenire conseguenze negative per l'ambiente e per la salute dell'essere umano. Per ricevere informazioni più dettagliate circa lo smaltimento delle vecchie apparecchiature il Vostro possesso, Vi invitiamo a contattare gli enti pubblici di competenza, il servizio di smaltimento rifiuti o il negozio - el quale avete acquistato il prodotto.


Declaratio- of Co- formity

Česky [Czech]	UBIQUITI NETWORKS tímto prohla uje, e tento UBIQUITI NETWORKS device, je ve shod se základními po adavky a dal ími p íslu n mi ustanoveními sm rnice 1999/5/ES.
Dansk [Danish]	Undertegnede UBIQUITI NETWORKS erklærer herved, at følgende udstyr UBIQUITI NETWORKS device, overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Nederlands [Dutch]	Hierbij verklaart UBIQUITI NETWORKS dat het toestel UBIQUITI NETWORKS device, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG. Bij deze verklaart UBIQUITI NETWORKS dat deze UBIQUITI NETWORKS device, voldoet aan de essentiële eisen en aan de overige relevante bepalingen van Richtlijn 1999/5/EC.
English	Hereby, UBIQUITI NETWORKS, declares that this UBIQUITI NETWORKS device, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Eesti [Estonian]	Käesolevaga kinnitab UBIQUITI NETWORKS seadme UBIQUITI NETWORKS device, vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
Suomi [Finnish]	UBIQUITI NETWORKS vakuuttaa täten että UBIQUITI NETWORKS device, tyypinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Français [French]	Par la présente UBIQUITI NETWORKS déclare que l'appareil UBIQUITI NETWORKS, device est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Deutsch [German]	Hiermit erklärt UBIQUITI NETWORKS, dass sich diese UBIQUITI NETWORKS device, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinie 1999/5/EG befindet". (BMW)

Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ UBIQUITI NETWORKS ΔΗΛΩΝΕΙ ΟΤΙ UBIQUITI NETWORKS device, ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1995/5/EK.
Magyar [Hungarian]	Alulírott, UBIQUITI NETWORKS nyilatkozom, hogy a UBIQUITI NETWORKS device, megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
Íslenska [Icelandic]	Hér me lí sir UBIQUITI NETWORKS yfir ví a UBIQUITI NETWORKS device, er í samræmi ví grunnkröfur og a rar kröfur, sem ger ar eru í tilskipun 1999/5/EC.
Italiano [Italian]	Con la presente UBIQUITI NETWORKS dichiara che questo UBIQUITI NETWORKS device, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar o UBIQUITI NETWORKS deklar , ka UBIQUITI NETWORKS device, atbilst Direkt vas 1999/5/EK b tiskaj m pras b m un citiem ar to saist tajem noteikumiem.
Lietuviškai [Lithuanian]	UBIQUITI NETWORKS deklaruoja, kad šis UBIQUITI NETWORKS įrenginys atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
Malti [Maltese]	Hawnhekk, UBIQUITI NETWORKS, jiddikjara li dan UBIQUITI NETWORKS device, jikkonforma mal- ti ijiet essenzjali u ma provvedimenti o rajn relevanti li hemm fid-Dirrettiva 1999/5/EC.
Norsk [Norwegian]	UBIQUITI NETWORKS erklærer herved at utstyret UBIQUITI NETWORKS device, er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.
Slovensky [Slovak]	UBIQUITI NETWORKS t mto vyhlasuje, e UBIQUITI NETWORKS device, sp a základné po iadavky a v etky príslu né ustanovenia Smernice 1999/5/ES.
Svenska [Swedish]	Härmed intygar UBIQUITI NETWORKS att denna UBIQUITI NETWORKS device, står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.
Español [Spanish]	Por medio de la presente UBIQUITI NETWORKS declara que el UBIQUITI NETWORKS device, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Polski [Polish]	Niniejszym, firma UBIQUITI NETWORKS o wiadcza, e produkt serii UBIQUITI NETWORKS device, spełnia zasadnicze wymagania i inne istotne postanowienia Dyrektywy 1999/5/EC.
Português [Portuguese]	UBIQUITI NETWORKS declara que este UBIQUITI NETWORKS device, está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Română [Romanian]	Prin prezenta, UBIQUITI NETWORKS declară că acest dispozitiv UBIQUITI NETWORKS este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 1999/5/CE.

Cutti- g Template

To mou- t the airCam Dome i- a ceili- g tile, you will - eed to cut a 73 mm diameter circle i- the ceili- g tile. You ca- use the template below as a guide for cutti- g the hole.

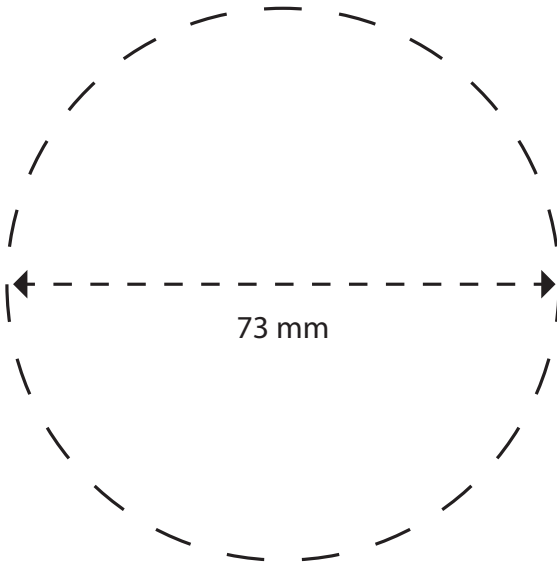

PDF Compressor Pro

Support **support.ubnt.com**
Commu- ity **community.ubnt.com**
Dow- loads **downloads.ubnt.com**

