


# Lantorg LT-U2P8

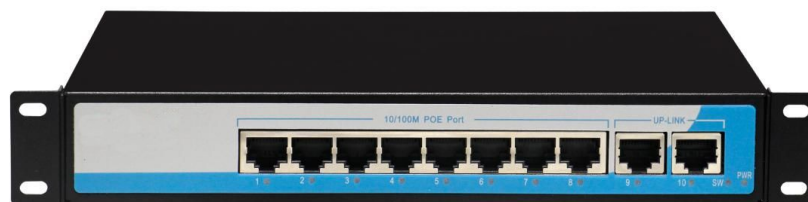

## Features

- ◆ IEEE 802.3af power on up to 8 ports
- ◆ Supply power to wireless access points and surveillance cameras over Cat-5 cabling
- ◆ 10\*10/100 Mbps Ports with AutoUplink™
- ◆ Supports PoE power up to 15.4W for each PoE port
- ◆ Supports PoE power up to 120W for all PoE ports
- ◆ Supports PoE IEEE 802.3af compliant PDs
- ◆ Supports IEEE 802.3x flow control for Full-duplex Mode and back pressure for Half-duplex Mode
- ◆ 1K entry MAC address table of the PoE Switch with auto-learning and auto-aging
- ◆ LED indicators for monitoring power, link
- ◆ Support Vlan and Extend Function
- ◆ Internal power adapter supply

activity and speed

- ◆ Internal power adapter supply

## Order information


Model No.	Description
Lantorg LT-U2P8	10*10/100M POE Switch,IEEE 802.3af,each port 15.4W

## Physical Pic Reference

# Lantorg LT-U2P8



Dimension(25.1\*16.1\*3.7cm, Net Weight: 0.92kg/unit)

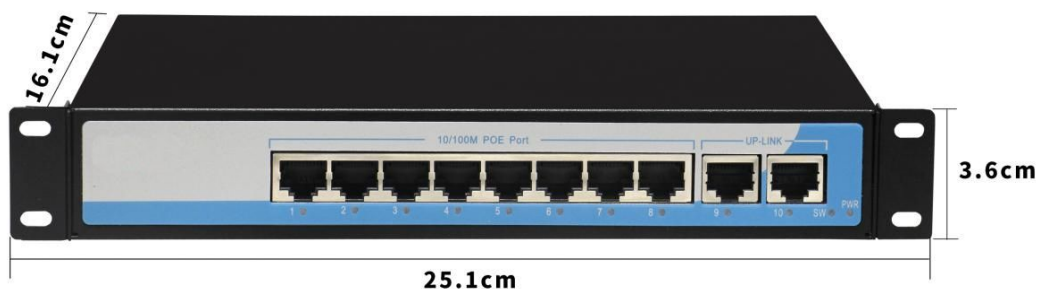

Package Dimension(30.3\*18.1\*5.7cm,Gross Weight:1.16kg/unit)



# Lantorg LT-U2P8

Technical parameter list	
Product Name	10-Ports AF PoE Switch with 8 PoE Ports and 2 Uplink
Model	Lantorg LT-U2P8
Connector Type	10x 10/100M copper cable RJ45 ports(8 PoE ports+2 Uplink)
Network Media	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter)
Bandwidth	2Gbps (non-blocking)
Address Database Size	1K
MTBF	190,000 hours (about 21 years)
Forwarding Mode	Store-And-Forward
Network Protocols	IEEE 802.3i 10BASET; IEEE 802.3u 100BASETX; IEEE 802.3x Flow Control; IEEE 802.1af DTE Power via MDI; IEEE 802.3af
LED Display	System: power supply; Every Port: connecting, PoE working status
Power Supply	Power input: AC100-240V 50/60Hz; (every country use a custom power plug)
PoE Ports	Port 1-8 support POE
PoE Port Power	15.4W for each POE port
PoE Standard	IEEE 802.3af
Led indicator	Green: Ethernet Red:PoE SW: <b>On: VLAN, 100meters</b> <b>Flashing: VLAN, 250meters</b> <b>Off: VLAN Closed,100meters</b> <b>Flashing: VLAN Closed, 250meters</b>
Working Environment	Operating Temperature: -20° ~ 55 ° C; Storage Temperature: -40 ° ~ 85 ° C; Operating Humidity: 10% ~ 95%, non-condensing
Certification	CE Mark ,commercial; CE/LVD EN60950, RoHS
Radiation	CE mark, commercial; FCC Part 15 Class B; VCCI Class B; EN 55022 (CISPR 22), Class B
Transmission Distance	Data transmission distance: 100m, 250m( when on 10M data rate with Cat6.)
Warranty	3 year warranty(1 yeas warranty for power adapter)